



**NEW**



**OPACITY MODE SPECIAL PURPOSE SENSOR**  
*Designed specifically for the detection of labels*

The **LABEL•EYE™** is a photoelectric sensor designed specifically to sense a variety of adhesive labels. Since the **LABEL•EYE™** is an automatic one-touch sensor...not the conventional "teach mode" sensor...set-up is simple. Position the gap between the labels directly under the sensors sight guide and push the appropriate Autoset™ button. The sensor does the rest, adjusting itself to the perfect setting. Sensing labels has never been easier.

**The Label Applicator Process**

The **LABEL•EYE™** is a special purpose gap/slot sensor optimized to sense a wide variety of adhesive labels adhering to a roll of backing paper. The web of labels is directed from a "roll" across a peeler plate and around a sharp edge. As the web passes around the sharp edge of the peeler plate, the adhesive label dislodges from the backing material. The function of the **LABEL•EYE™** is to look through the backing paper to detect the "gap" between the labels and to signal the labeling machine to stop the dispensing mechanism before the label is completely dislodged from the backing material. With the next "up" label protruding off the end of the peeler plate, it is now perfectly positioned to be applied to the next product as it passes by on a conveyor.

The **LABEL•EYE™** operates on 10 to 30 VDC and is pulse-modulated to prevent any problems from ambient light. Although designed for label detection, the **LABEL•EYE™** can be useful in a variety of applications.

**Other Possible Uses:**

- Opacity mode sensing
- Double sheet detection
- Envelope contents sensing
- Edge guiding
- Splice detection
- Label counting
- Unwinder, rewinder
- Die cutter
- Label hot-printing
- Rotary die cutting & converting
- High speed dispensing

For Product Detection  
We Recommend the  
**EZ-PRO™** Sensor




# SPECIFICATIONS



<b>SUPPLY VOLTAGE</b> <ul style="list-style-type: none"> <li>• 10 to 30 VDC</li> <li>• Polarity Protected</li> </ul>	<b>HYSTERESIS</b> <ul style="list-style-type: none"> <li>• Minimal hysteresis promotes the detection between the backing material and the label depending on the settings</li> </ul>
<b>CURRENT REQUIREMENTS</b> <ul style="list-style-type: none"> <li>• 45 milliamps (exclusive of load)</li> </ul>	<b>LIGHT IMMUNITY</b> <ul style="list-style-type: none"> <li>• Responds to sensor's pulsed modulated light source ... immune to most ambient light</li> </ul>
<b>OUTPUT TRANSISTORS</b> <ul style="list-style-type: none"> <li>• (1) NPN and (1) PNP output transistors</li> <li>• Sensor outputs can sink or source up to 150 milliamps (current limit)</li> <li>• All outputs are continuously short circuit protected</li> </ul>	<b>INDICATORS</b> <ul style="list-style-type: none"> <li>• Green LED flashes when AutoSet™ routine is activated and stays illuminated when AutoSet™ is completed</li> <li>• Red LED illuminates when sensor's output transistors are "ON"</li> </ul> <p>Note: The status of the output transistors can be inverted by pushing both buttons simultaneously.</p>
<b>RESPONSE TIME</b> <ul style="list-style-type: none"> <li>• Light state response = 100 microseconds</li> <li>• Dark state response = 100 microseconds</li> </ul>	<b>AMBIENT TEMPERATURE</b> <ul style="list-style-type: none"> <li>• -40°C to 70°C (-40°F to 158°F)</li> </ul>
<b>LED LIGHT SOURCE</b> <ul style="list-style-type: none"> <li>• High intensity red LED</li> <li>• Pulse modulated</li> </ul>	<b>RUGGED CONSTRUCTION</b> <ul style="list-style-type: none"> <li>• Chemical resistance to harsh cleaners, such as detergents, alcohols, and ketones</li> <li>• Waterproof ratings: NEMA 4 and IP66</li> <li>• Conforms to heavy industry grade CE and UL requirements</li> </ul>
<b>PUSH BUTTON CONTROL</b> <ul style="list-style-type: none"> <li>• Automatic set-up routines based on web opacity</li> <li>• One push button set-up</li> <li>• Simultaneously pushing both buttons inverts the output</li> </ul>	<p style="text-align: right;"><i>Product subject to change without notice.</i></p>

<b>Model Numbers:</b>		<b>Nano Cable (M8) Selection Guide</b>		
<u>Label•Eye</u>	<u>Description</u>	<u>P/N</u>	<u>Length</u>	<u>Thread Coupling</u>
LER	Red LED, 4 conductor 6 ft. cable	GEC-6	6 ft. (1.8m)	Straight Female
LERC	Red LED, 4-pin Nano connector	GEC-15	15 ft. (4.6m)	Straight Female
		RGEC-6	6 ft. (1.8m)	90° Female
		RGEC-15	15 ft. (4.6m)	90° Female

# DIMENSIONS

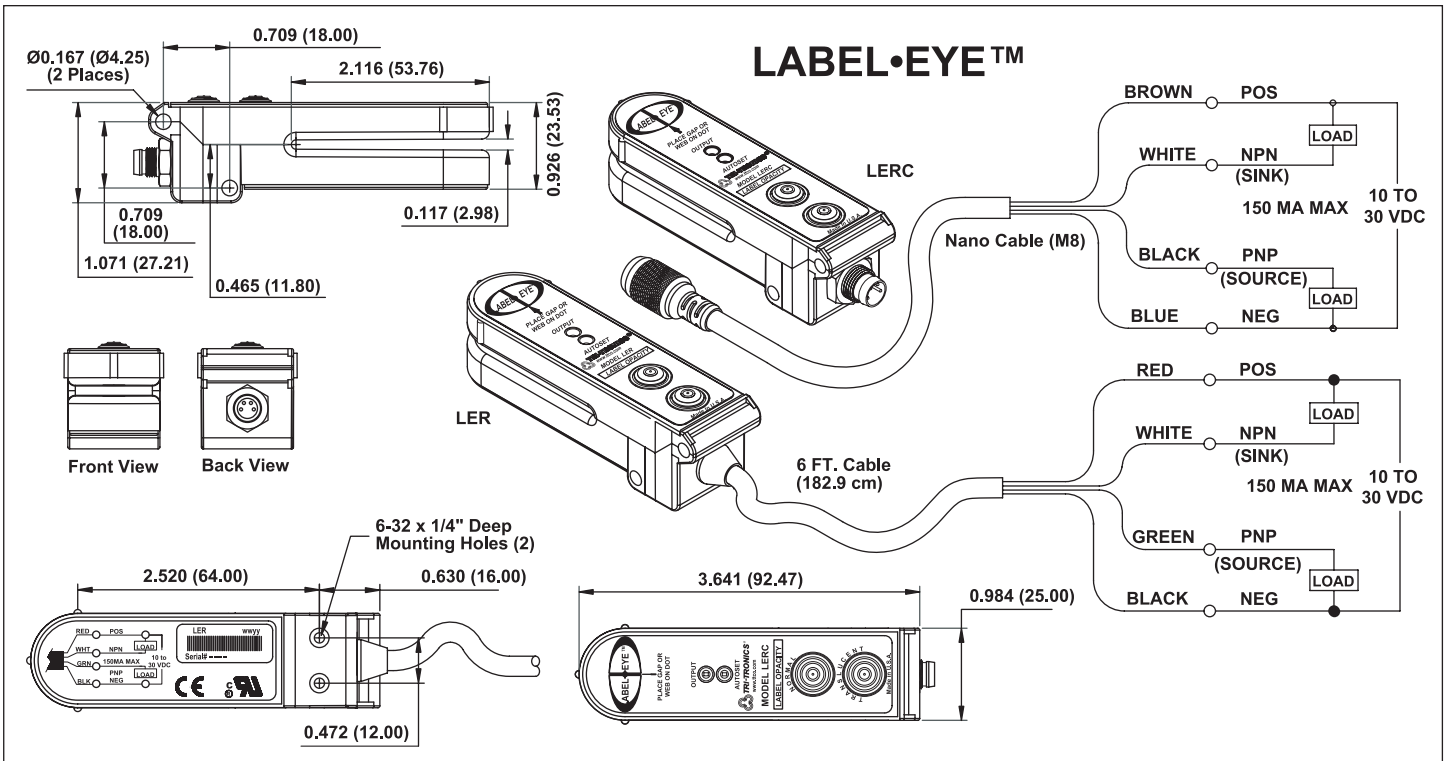

Proudly made in the U.S.A. by

**TRI-TRONICS®**

P.O. Box 25135, Tampa, FL 33622-5135  
 TEL: (813) 886-4000 / TOLL FREE: (800) 237-0946  
 FAX: (813) 884-8818 / TOLL FREE: (800) 375-8861  
 www.ttco.com / info@ttco.com