



Main characteristics (20 °C)

Standard process temperature	-50 ... 250 °C
Accuracy	Pt100 output as to DIN/EN/IEC 60751 Transmitter output <±0.1 °C / <±0.25 °C
Connections	Hygienic

Technical specification

Measuring principle	Resistance Temperature Detector (RTD)
Measuring ranges	-50...400 °C
Immersion tube, diameter	Ø6 mm, Ø8 mm
Immersion tube, length	Min. 20 mm - Max. 3000 mm
Immersion tube, tip	Normal response - Ø6/Ø8 mm Fast response - Ø6/Ø4 or Ø8/Ø4 mm
Process connections	See page 4

Environment

Temperature, Ambient	-40...160 °C
- w. transmitter	-40...85 °C
- w. display	-30...80 °C
Protection rating, IEC 529	IP67 / IP69K, depending on electrical connection
Humidity, IEC 68-2-38	98%, condensing
Vibration IEC60068-2-6	DNV high vibration strain, class B 1.6 mm, 2...25 Hz IEC60068-2-6, test FC 25...100 Hz, 4.0 g

Material

Process connection	S.S. 14404, AISI 316L
Housing	S.S. 14301, AISI 304
Sealing	To be ordered separately see table page 4

Main features

- Pt100 sensor element, 2- or 4-wire
- Built in graphical display, CombiView™ DFON optional
- Head mounted 4...20 mA transmitter, FlexTop type 22xx
- HART®
- ATEX
- 3-A, FDA
- Programmable by touch screen
- Easy and full programmable with FlexProgrammer 9701

Applications

- Food and beverage
- Pharmaceutical
- Water treatment
- General process industry

Approvals

Apply to	EMC directive 2004/108/CE in accordance with EN 61000-6-2, EN 61000-6-3 Pressure directive 97/23/CE FDA
Certificates	3-A


Sensor element and electrical specification

Sensor type	RTD type Pt100 (acc. to DIN/EN/IEC 60751) Single or Double 2-wire or 4-wire
Accuracy	Class 1/1 B $\pm(0,3 + (0,005 \times T))$ °C Class 1/3 B $\pm 1/3 \times (0,3 + (0,005 \times T))$ °C Class 1/6 B $\pm 1/6 \times (0,3 + (0,005 \times T))$ °C Class 1/1 A $\pm(0,15 + (0,002 \times T))$ °C
Analog output	4-20 mA, 20-4 mA 4-20mA+HART® See separate data sheet, series 22xx

Time constant, τ 0,5

Medium	Liquid	Air	Air
Velocity	0,4 m/sec.	0 m/sec	3 m/sec
Ø 6mm	<6,1	<138	<27,2
Ø 6/4mm	<1,5	<136	<21,4
Ø 8mm	<7,6	<201	<47,7
Ø 8/4mm	<1,5	<181	<33,6

Temperature curve

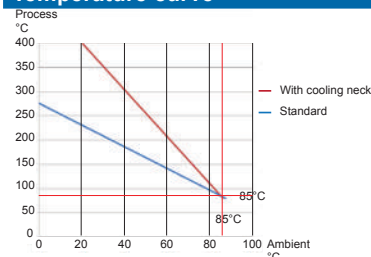

Technical Data

Transmitter, type FlexTop 2202 - Standard

Input	Pt100
Output	4...20 mA
Accuracy	
Input	< ±0.25°C
Output	< ±0.1% of output span (16mA)
Range	-200...850°C
Minimum span	25°C
Supply	8...35 VDC
Programmability	By FlexProgrammer 9701
For further information please see data sheet for FlexTop 2202	

Transmitter, type FlexTop 2211 - Performance

Input	Pt100 / Pt1000 (universal)
Output	4...20 mA
Accuracy	
Input	< ±0.1°C
Output	< ±0.1% of output span (16mA)
Range	-200...850°C
Minimum span	25°C
Supply	8...35 VDC
Programmability	By FlexProgrammer 9701
For further information please see data sheet for FlexTop 2211	

Display DFON

Type	Graphically LCD
Front glass	Polycarbonate
Display modes	8 modes, programmable, e.g. value, bar graph, analogue, tank illustration
Background	White, green, red - programmable
Measuring range	-9999...99999
Digit height	Max. 22 mm
Accuracy	0,1% @ ambient -10...70 °C
Voltage drop	4V...6.5 V
Output	2 configurable relay output, 60 Vp, 75 mA
Programming	Touch screen or FlexProgrammer 9701

Further information can be found in separate data sheet for DFON

Transmitter, type FlexTop 2221 - Performance, HART®

Input	Pt100 / Pt1000 (universal)
Output	4...20 mA / HART
Accuracy	
Input	< ±0.1°C
Output	< ±0.1% of output span (16mA)
Range	-200...850°C
Minimum span	25°C
Supply	8...35 VDC
Programmability	By FlexProgrammer 9701 By HART terminal/modem

For further information please see data sheet for FlexTop 2221


Transmitter, type FlexTop 2212 - Performance

Input	Pt100 / Pt1000 (universal)
Output	4-20 mA / 20-4 mA
Accuracy	
Input	≤ ±0.06°C
Output	< ±0.025% of output span (16mA)
Range	-200...850°C
Minimum span	10°C
Supply	7...40 VDC
Programmability	By FlexProgram

For further information please see data sheet for FlexTop 2212


Electrical connections

M12, 5-wire





RTD Single	Double
1+2 Pt100-1	
3+4 Pt100-1	
1 Pt100 - 1	
2 Pt100 - 1	
3 Pt100 - 2	
4 Pt100 - 2	
5 N.C.	N.C.

M12, 8-wire



1 N.C.	
2 + supply, 4...20 mA	
3 Relay 2	
4 Relay 2	
5 Relay 1	
6 Relay 1	
7 - supply, 4...20 mA	
8 N.C.	



Cable gland

Transmitter	
1	+24VDC / - 4...20mA
2	- 24VDC / +4...20mA
1	Red clip (FlexProgrammer)
2	Black clip (FlexProgrammer)

Display

1	N.C.
2	N.C.
3	Relay 2
4	Relay 2
5	Relay 1
6	Relay 1
Com 1	Red clip (FlexProgrammer)
Com 2	Black clip (FlexProgrammer)



ATEX data for temperature transmitters and displays

Transmitter, type FlexTop 2202 - ATEX

Approval	Ex ia IIC T5/T6, ATEX II 1G Ex nA II T5, ATEX II 3G
Supply	8...28 VDC
Internal inductivity	$L_i \leq 10 \mu\text{H}$
Internal capacity	$C_i \leq 10 \text{ nF}$
Temperature class	T1...T5: $-40 < T_{\text{amb}} < 85^\circ\text{C}$ T6: $-40 < T_{\text{amb}} < 50^\circ\text{C}$
Barrier data	U: $\leq 28 \text{ VDC}$ I: $\leq 0.1 \text{ A}$ P: $\leq 0.75 \text{ W}$

Transmitter, type FlexTop 2211 - ATEX

Approval	Ex ia IIC T5/T6, ATEX II 1G Ex nA II T5, ATEX II 3G
Supply	6.5...30 VDC
Internal inductivity	$L_i \leq 15 \mu\text{H}$
Internal capacity	$C_i \leq 5 \text{ nF}$
Temperature class	T1...T5: $-40 < T_{\text{amb}} < 85^\circ\text{C}$ T6: $-40 < T_{\text{amb}} < 50^\circ\text{C}$
Barrier data	U: $\leq 30 \text{ VDC}$ I: $\leq 0.1 \text{ A}$ P: $\leq 0.75 \text{ W}$

Display DFON - ATEX

ATEX Gas ia and for ATEX Dust ia

Approval Gas Zone 0/1 Dust Zone 20/21	 II 1 G, Ex ia IIC T5 Ga  II 1 D, Ex ia IIIC T100°C Da
Voltage drop	U_{Disp} 4.5 ... 6.5 VDC
Temperature class	$L_i \leq 15 \mu\text{H}$ $C_i \leq 5 \text{ nF}$
Temperature class	T1...T5 Zone 0 and 20 $-20 \dots 60^\circ\text{C}$ Zone 1/2 and 21/22 $-40 \dots 65^\circ\text{C}$
Internal inductivity	$L_i < 10 \mu\text{H}$
Internal capacity	$C_i < 15 \text{ nF}$
Barrier data	$U_i < 30 \text{ VDC}$ $I_i < 0.1 \text{ A}$ $P_i < 0.75 \text{ W}$

ATEX Gas nA


Approval Gas Zone 2	 II 3 G, Ex nA II T5
Voltage drop	U_{Disp} 4.5 ... 6.5 VDC
Temperature class	T1...T5 $-30 < T_{\text{amb}} < 65^\circ\text{C}$
Internal inductivity	$L_i < 10 \mu\text{H}$
Internal capacity	$C_i < 15 \text{ nF}$
Maximum voltage	$U_{\text{max}} < 35 \text{ VDC}$
Maximum current	$U_{\text{max}} < 0.1 \text{ A}$

Transmitter, type FlexTop 2221 - ATEX


Approval	Ex ia IIC T5/T6, ATEX II 1G Ex nA II T5, ATEX II 3G
Supply	8...30 VDC (Ex nA : 12...30 VDC)
Internal inductivity	$L_i \leq 15 \mu\text{H}$
Internal capacity	$C_i \leq 5 \text{ nF}$
Temperature class	T1...T5: $-40 < T_{\text{amb}} < 85^\circ\text{C}$ T6: $-40 < T_{\text{amb}} < 50^\circ\text{C}$
Barrier data	U: $\leq 30 \text{ VDC}$ I: $\leq 0.1 \text{ A}$ P: $\leq 0.75 \text{ W}$

Dimensions (mm)


Ø80 mm housing front view





Ø80 mm housing bottom connection




Ø80 mm housing rear connection




Ø55 mm housing

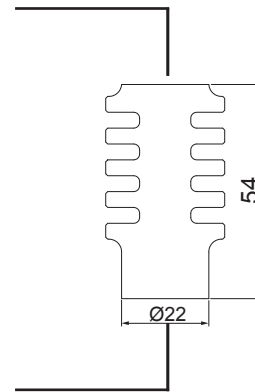


G1/2A Hygiene
Code 51

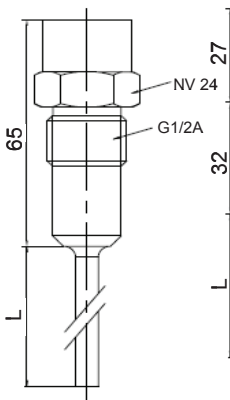


3-A DN 38
Code 60

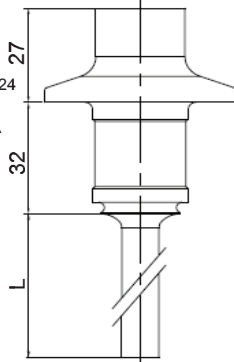



ISO 2852 DN 38
Code 65



ISO 2852 DN 51
Code 66



Variline® type N
Code 70

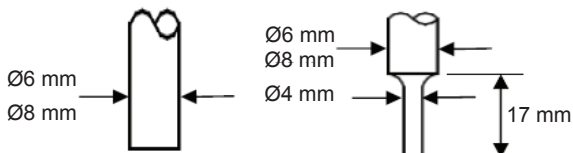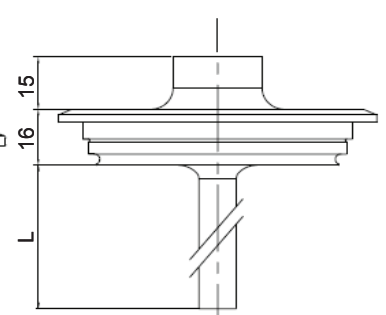

Seal is to be purchased separately.
For other types and materials please see data sheet for accessories.

Accessories – seals

Seal type	Code	Material	Approvals	Item Number
O-ring	60	EPDM	3-A FDA	ZPX2-123
-	70	EPDM	3-A FDA	ZPX2-323
Gasket	65	EPDM	3-A FDA	ZPX3-7233
-	66	EPDM	3-A FDA	ZPX3-7263

Ordering details

[illegible]

If the product wanted is not available from above list please inquire.