

Overview

- Compact and robust stainless steel housing
- On-site setting with qTeach
- Two adjustable switching outputs
- Multicolor LED display of switching statuses
- Interface IO-Link



Technical data

Performance characteristics

Measuring principle	CleverLevel level switches (Frequency Sweep)
Media characteristics	DC > 1.5
Hysteresis	± 1 mm
Repeatability	± 1 mm
Response time	0.04 s , typ.
Damping	0... 10 s , adjustable

Process conditions

Process pressure	Refer to section "Operating conditions"
Process temperature	Refer to section "Operating conditions"

Process connection

Mounting position	Any, top, bottom, side
Connection variants	Refer to section "Dimensional drawings"
Wetted parts material	PEEK Natura AISI 316L (1.4404)
Surface roughness wetted parts	Ra ≤ 0.8 µm

Ambient conditions

Vibration (sinusoidal) (EN 60068-2-6)	1.6 mm p-p (2 ... 25 Hz), 4 g (25 ... 100 Hz), 1 octave / min.
Degree of protection (EN 60529)	IP 67 IP 69K , with appropriate cable
Humidity	< 98 % RH , condensing
Operating temperature range	-40 ... 85 °C
Storage temperature range	-40 ... 85 °C

Output signal

Output type	Digital (push-pull) NPN PNP
-------------	-----------------------------------

Output signal

Switching logic	Active high Active low Normally closed (NC) Normally open (NO)
Voltage drop	NPN: (+0.4 V) ± 0.2 V, Rload ≥ 10 kΩ PNP: (+Vs -0.5 V) ± 0.2 V, Rload ≥ 10 kΩ
Current rating	100 mA , max.
Off leak current	< 100 µA , max.
Short circuit protection	Yes
Interface	IO-Link 1.1

Housing

Overall size	Refer to section "Dimensional drawings"
Style	Compact transmitter
Material	Stainless steel

Electrical connection

Connector	M12-A, 4-pin, polycarbonate M12-A, 4-pin, stainless steel
-----------	--

Power supply

Current consumption (no load)	25 mA , typ. 40 mA , max.
Reverse polarity protection	Yes
Power-up time	< 3 s
Voltage supply range	8 ... 36 V DC

Factory settings

qTeach	activated
Switching logic SW1	Normally open (NO)
Switching logic SW2	Normally closed (NC)
Switching range (dielectric constant DC)	< 75 % , DC > 2
Range hysteresis	2.4 %
Damping	0.1 s

LBFI

LBFI-21.###.####20.#.#000.0/Article number: 96003361

Technical data

IECEX / ATEX II 1D Ex - ta IIIC T100 °C Da

Voltage supply range, Un	30 V DC , max.
Current rating, In	100 mA
Degree of protection for cable accessories	IP 67
Temperature class T100 °C	-40 < Tamb < 85 °C

IECEX / ATEX II 1G - Ex ia IIC T4 Ga

Maximum values for barrier selection, Ui	30 V DC , max.
Maximum values for barrier selection, Ii	100 mA
Maximum values for barrier selection, Pi	750 mW
Internal capacitance, Ci	63 nF
Internal inductance, Li	617 µH
Temperature class, T1 ... T4	-40 < Tamb < 85 °C

IECEX / ATEX II 3G - Ex nA IIC T4 Gc

Voltage supply range, Un	30 V DC , max.
Current rating, In	100 mA
Degree of protection for cable accessories	IP 67
Temperature class, T1 ... T4	-40 < Tamb < 85 °C


Compliance and approvals

EMC Emission	EN 61326, installed in a closed metal tank
EMC Immunity	EN 61326, installed in a closed metal tank
Explosion protection	ATEX II 1G Ex ia IIC T4 Ga ATEX II 1D Ex ta IIIC T100 °C Da ATEX II 3G Ex nA IIC T4 Gc
Hygiene	FDA (21 CFR 177.2415)
Safety	cULus listed, E365692


Operating conditions

Ordering key	Process connection	BCID	Continuous		Temporary (t < 1 h)	
			Process temperature @ Tamb < 50 °C	Process pressure	Process temperature max. @ Tamb < 50 °C	Process pressure @ Process temperature max.
			(° C)	(bar)	(° C)	(bar)
G070	G 1/2 A ISO 228-1 BSC	G07	-40 ... 115	-1 ... 100	135	-1 ... 100
A030	G 1/2 A hygienic	A03	-40 ... 115	-1 ... 10	135	-1 ... 5
A031	G 1/2 A hygienic, length 82 mm	A03	-40 ... 115	-1 ... 100	135	-1 ... 100
N020	1/2-14 NPT	N02	-40 ... 115	-1 ... 100	135	-1 ... 100


Dimensional drawings

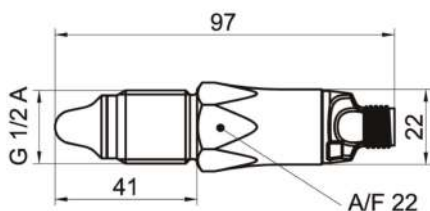

G 1/2 A ISO 228-1 BSC (BCID: G07)

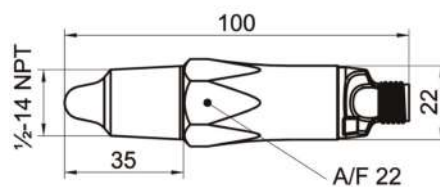


1/2-14 NPT (BCID: N02)

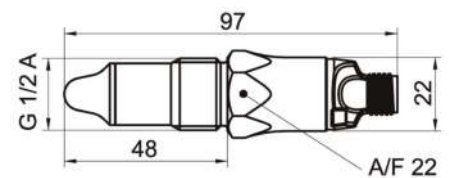

G 1/2 A hygienic (BCID: A03)

Dimensional drawings

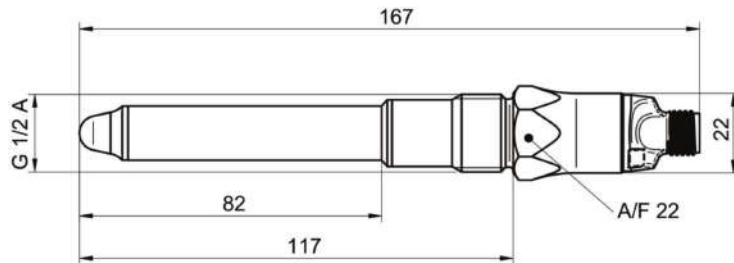

G 1/2 A hygienic, 82 mm length (BCID: A03)

Electrical connection

Process connection

Output type	Electrical connection	Equivalent circuit	Function	Pin assignment
Programmable output IO-Link PNP			+Vs	1
			SW1 (IO-Link)	4
			SW2	2
			GND (0 V)	3
Programmable output IO-Link NPN			+Vs	1
			SW1 (IO-Link)	4
			SW2	2
			GND (0 V)	3
Programmable output IO-Link Digital (push-pull)			+Vs	1
			SW1 (IO-Link)	4
			SW2	2
			GND (0 V)	3
Programmable output IO-Link PNP			+Vs	1
			SW1 (IO-Link)	4
			SW2	2
			GND (0 V)	3
			Frame Ground	Plug thread
Programmable output IO-Link NPN			+Vs	1
			SW1 (IO-Link)	4
			SW2	2
			GND (0 V)	3
			Frame Ground	Plug thread
Programmable output IO-Link Digital (push-pull)			+Vs	1
			SW1 (IO-Link)	4
			SW2	2
			GND (0 V)	3
			Frame Ground	Plug thread

Ordering information
Ordering key - Configuration possibilities see website

	LBFi	-	2	1	.	###	.	####	2	0	.	#	.	#	00	0	.	#
Product	Level switches																	
Version	Programmable output, IO-Link			2														
Housing	AISI 316L (1.4404)			1														
Electrical connection	M12-A, 4-pin, polycarbonate (with LED)					010												
	M12-A, 4-pin, stainless steel (without LED)					020												
Process connection	G 1/2 A ISO 228-1 (G07)							G070										
	1/2-14 NPT (N02)							N020										
	G 1/2 A hygienic (A03)							A030										
	G 1/2 A hygienic L82 mm (A03)							A031										
Wetted parts material	AISI 316L (1.4404)							2										
Gasket	Without							0										
Output type	PNP											1						
	NPN											2						
	Digital (push-pull)											3						
Explosion protection	Without															0		
	IECEEx / ATEX nA															3		
	IECEEx / ATEX ia + ta															4		
Industrial approvals	Standard															00		
Special approvals	Standard																0	
Configuration	Factory settings																	0
	Customer-specific																	1